

BRONCO POLYESTER BODY FILLER

PRODUCT DESCRIPTION

Bronco Body Filler is an impact and shock resistant polyester putty especially designed for use on auto-body for patching of dents, leaks, holes and flaws. When mixed with hardener and applied, it has excellent flexibility, adhesion, hardness, heat resistance and sanding properties.

IDEAL FOR REPAIRS OF:

Furniture
Walls
Cars
Boats

AVAILABLE SIZES


1 kg & 4 kg

MIXING

Mix filler thoroughly from bottom up. Knead cream hardener tube thoroughly before using. Place desired amount of BRONCO Polyester Body Filler on clean, flat, non-porous surface, such as glass, metal or plastic tray. Each tube of cream hardener is enough for the entire can of BRONCO Polyester Body Filler. Use the following ratio: 1/4 tube hardener to 1/4 can plastic filler. Mix thoroughly using plastic spreader or putty knife to uniform color. Mix with firm pressure using smooth back and forth wiping motion. MIX ONLY IN SMALL AMOUNTS THAT CAN BE USED IN 3 TO 4 MINUTES. DO NOT MIX CREAM HARDENER IN THE BODY FILLER CONTAINER.

SURFACE PREPARATION

Grind surface with #40 sandpaper until thoroughly cleaned and roughened. Prepare the surface 3 inches beyond the damaged area at each side. Clean surface with metal prep solutions and have it free from dirt, oil, grease, paint, wax, rust and moisture.

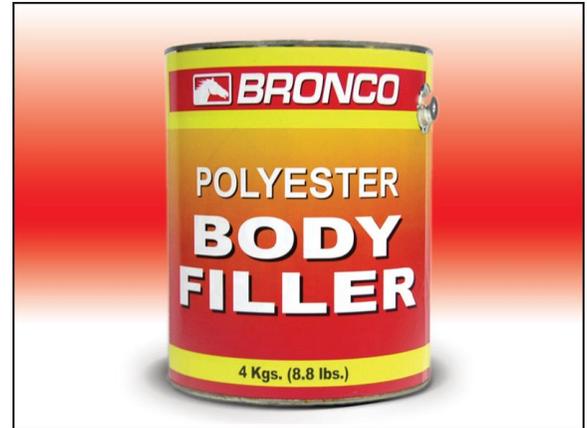

APPLICATION

Spread initial thin layer of mixed filler over surface, using firm pressure to assure maximum adhesion. Work up thickness and overlap edges of damaged area. Smooth to contour. To fill dents, do not apply the filler too thick; its better to apply in two steps. DO NOT PUT UNUSED MIXED MATERIALS BACK IN CAN. DO NOT USE MIXING TOOL TO REMOVE FROM PLASTIC CAN.

BENEFITS:

- Impact and Shock Resistant
- Can be sanded
- Excellent Flexibility

FINISHING:

Sand in 8 to 12 minutes after application. Sand and featheredge repair to desired contour after 20 to 25 minutes. Use coarse sandpaper like 80 grit for sanding and finer sandpaper for featheredging. Wait approximately 45 minutes, then prime and paint as required.

PRECAUTION

Product must be stored at room temperature. Do not store near heat, sparks or open flame. Exposure to heat may cause bursting. Use in a well-ventilated area. Avoid breathing vapors or spray must be in open windows and doors or use other means to insure fresh air entry during application. Should apply during warm weather.